REVISIONS			
REV	DESCRIPTION	DATE	REV BY
0	INITIAL ISSUE	08-05-03	TC

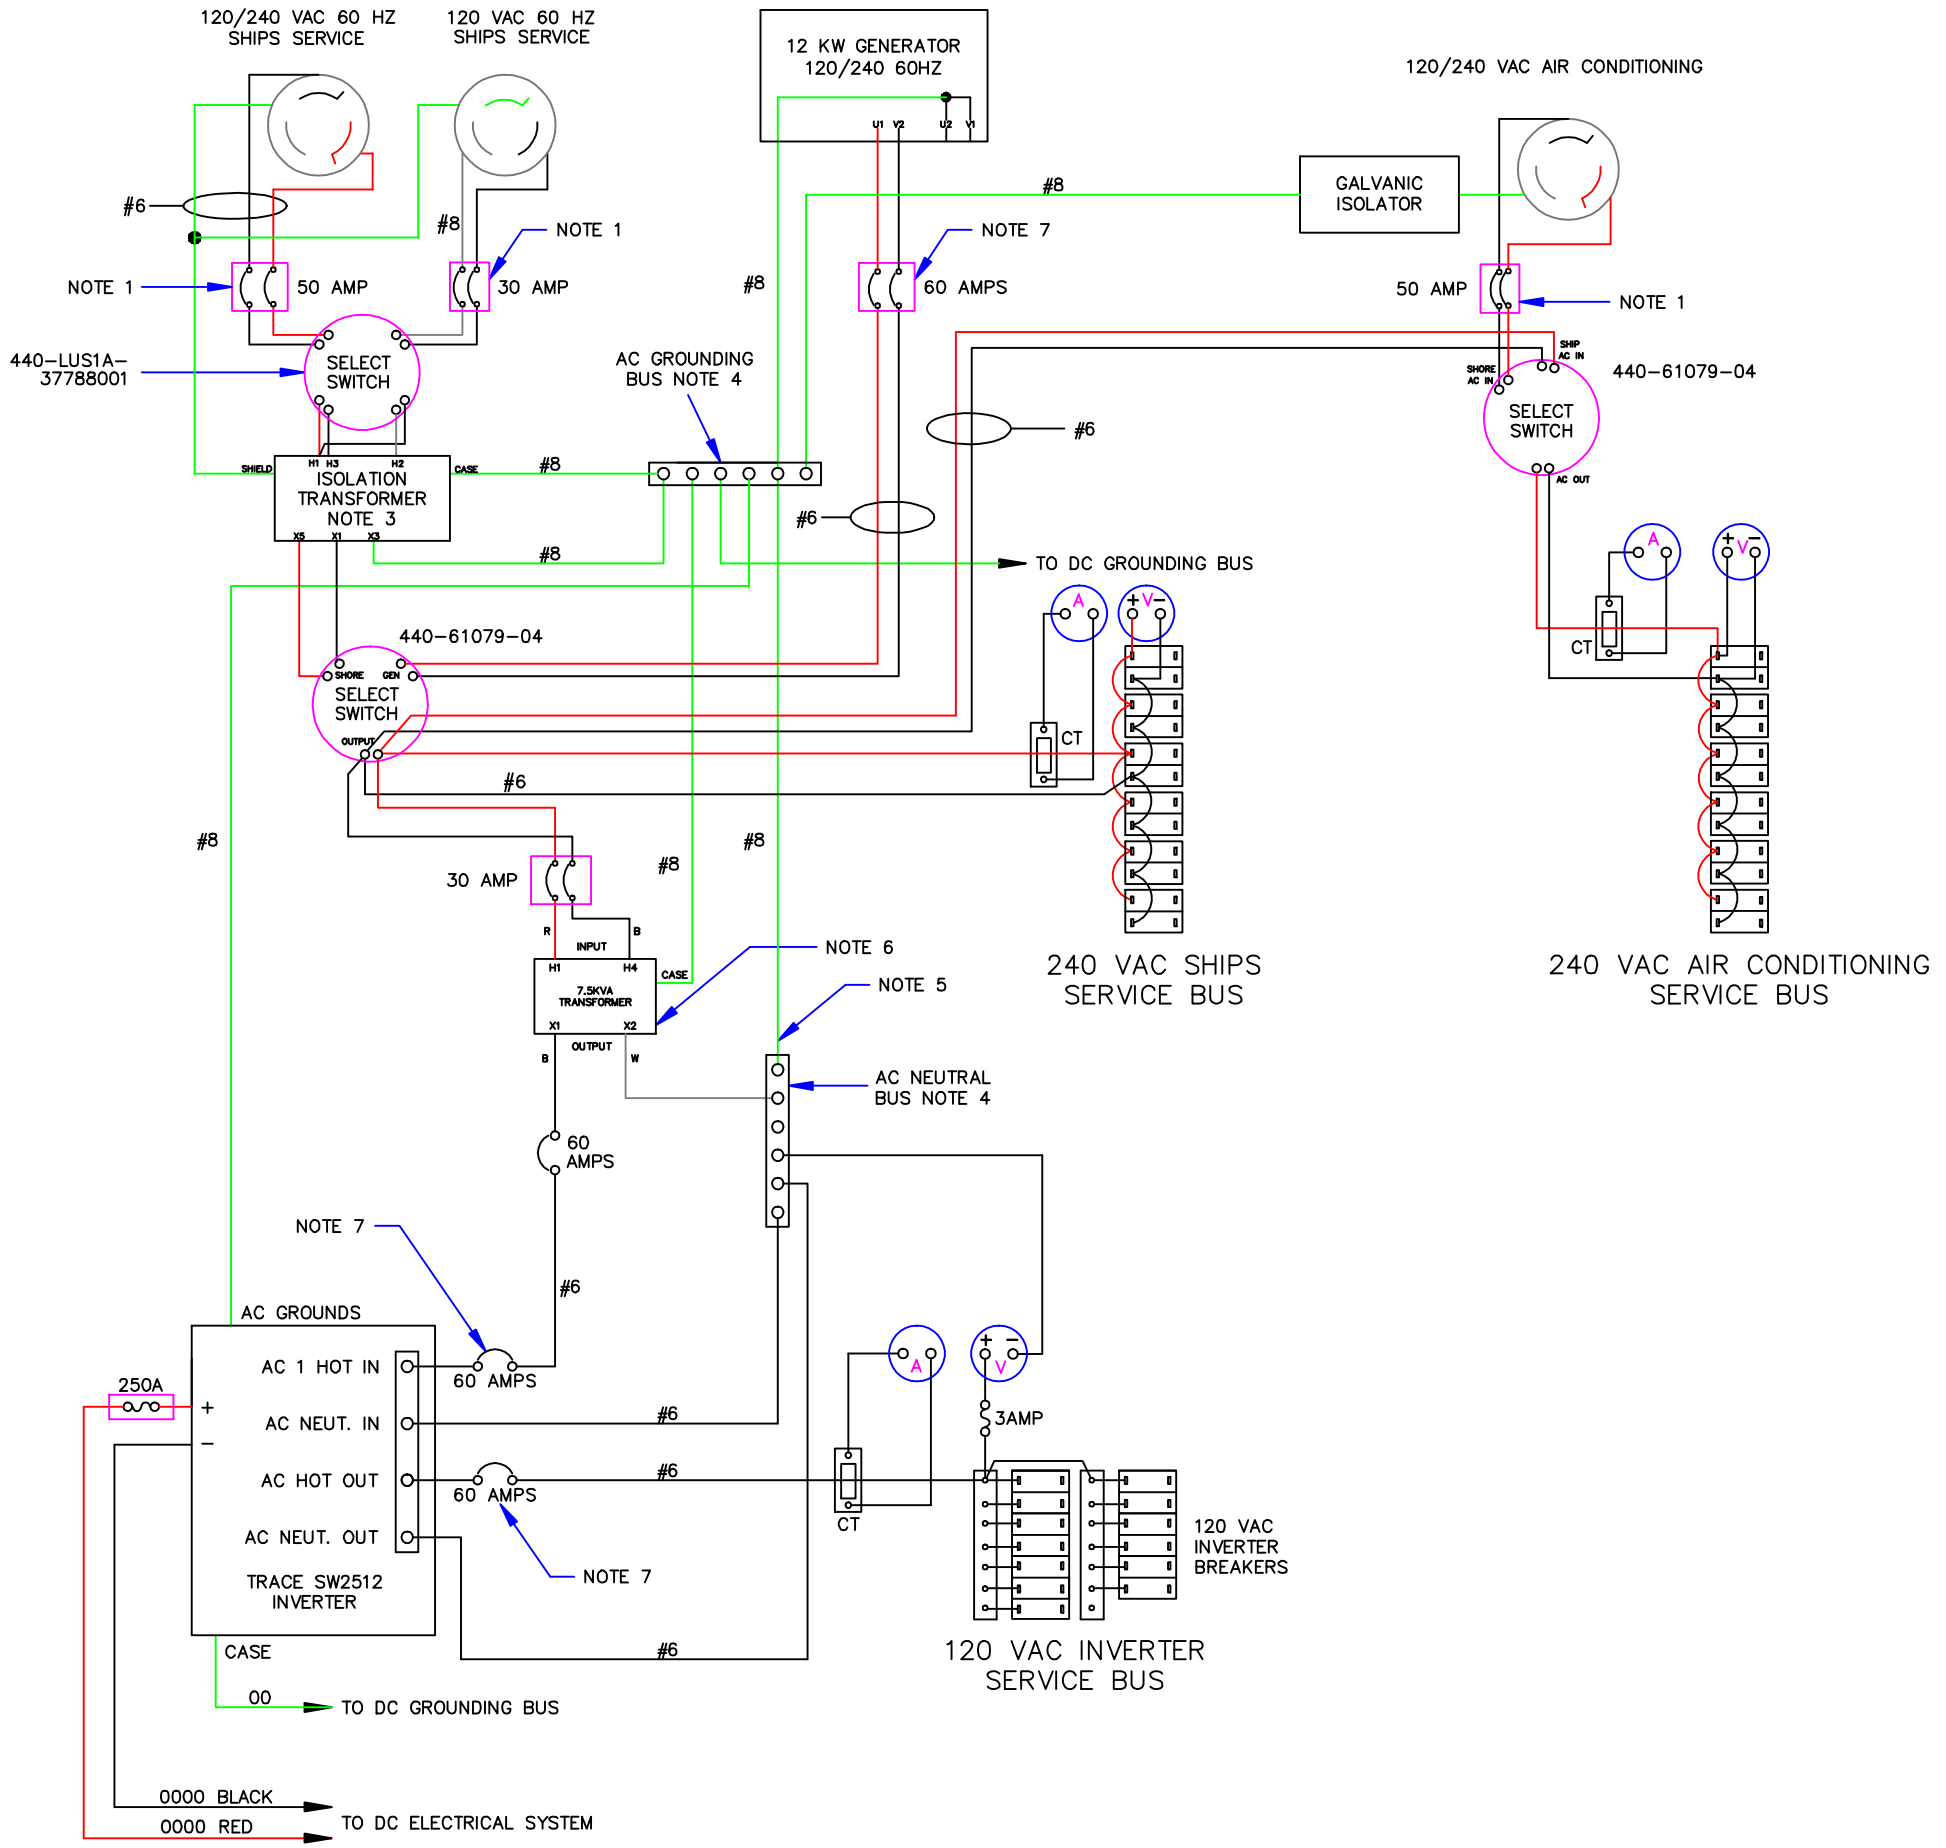

NOTES:

1. BREAKERS MUST BE LOCATED WITHIN 10 FEET OF INLET CONNECTION.
2. NOTE DELETED.
3. OLSUN ELECTRIC CORP, MODEL GS12YY-01 ISOLATION TRANSFORMER LOCATED IN PILOT HOUSE.
4. AC GROUNDING BUS AND AC NEUTRAL BUS ARE LOCATED BEHIND THE MAIN ELECTRICAL PANEL.
5. NEUTRAL TO GROUND BONDING WIRE.
6. OLSUN ELECTRIC CORP. CAT#SGS7.5HD-2-15-SS LOCATED IN PILOT HOUSE.
7. BREAKERS LOCATED WITHIN 40 INCHES WIRE LENGTH OF THE OUTPUT OF THE EQUIPMENT AND ARE SHEATHED.

NORDHAVN 50 AC ELECTRICAL SYSTEM

PACIFIC ASIAN ENTERPRISES
PO BOX 874, AT-THE HARBOR, DANA POINT, CALIFORNIA 92629
PH (949)496-4848 FAX (949)240-2398

SIZE	PRJ. NO.	DWG NO.	DWG
B	N5025	N50ACS-5025SW	DH

SCALE: NTS	DATE: SEE ABOVE	REV: SEE ABOVE	SHEET: 1 OF 1